

TI



? WJZS` [US^>aSV  
7` ZS` UW

BdVgUF1 Sds` fk

>[` WsdBal` Wd  
l Sds` fk

3` `gS`^6WdSVSfja`  
AWdSVSfja` u



QUALITY™  
Continuous Quality Assurance

# 66HL4M-(V) 610-635 Watt

## Mechanical Characteristics

5W*FkbW	@ žrkbW? a` a žJkfeS^f W
@ažaXUW'e	#%\$( (° \$fi
6[ W e[a` e	\$%\$° ##%&° % _ _
I WYZf	\$*ž\$ ]Y
8d` f 9'See	%ž\$ _ ! 3` f[ždW VUf[a` 5aSf[ Yl : [YZ FdS` e_ [ee[a` t >ai :d` t FV_ bWVW 9'See
8dS_ W	3` aV[l VW 3'g_ [ [g_ 3^ak
<g` Uf[a` 4aj	;B(* DSfVW
BdchWUf[a` 5'See	5'See;;
:75 8[dMfkbW	5'See 5
5a` ` WUfadFkbW	<=" %? !? 5&! AfZVde
Agfbgf 5ST Wđ	&Z' _ _ ^ /Efj &" _ _ t/žj \$" _ _ ad5gefa_ [l VW >W YfZ

## Packaging Configuration

BS^W 6[ W e[a` e	\$%+(° ##^° #S' # _ _
BSU[ Y VVWS[^ /Fi a bS^W e/A` WefSU] fi	%# bUe! bS^W e! (\$ bUe! efSU] t ( "\$ bUe! &" r: C 5a` fS[ Wđ

## Specifications (STC)




? S] [ _ g_ Bai Wđ B_ Sj M bO	(#" (#' (\$' (\$' (%' (%'
? S] [ _ g_ Bai Wđ Ha fSYW H_ b MIO	&" ž ( &" ž) % &" ž+ &" ž' ) &#ž\$% &#ž' t
? S] [ _ g_ Bai Wđ 5gdW f ;_ b NBO	#' ž' & #' ž## #' ž#( #' ž\$ \$ #' ž\$* #' ž' &
A bW žU[d]g[f Ha fSYW HaU MIO	&* ž' % &* ž) + &* ž+' &+ž## &+ž\$) &+ž&%
E Z ad žU[d]g[f 5gdW f :eU NBO	#( ž' # #( ž' * #( ž# #' ( ž\$ \$ #( ž\$+ #( ž' t
? aVg W7 U[W Uk EF5 M O	\$ž\$ * \$žž) \$žž+' \$žž#& \$žž/\$ \$žž/ #
Bai Wđ Fa WđS` UW	" p t %
FV_ bVđSfgdV5aW U[W feaXB_ Sj	ž ž\$ , !, 5
FV_ bVđSfgdV5aW U[W feaXHaU	ž ž\$ , !, 5
FV_ bVđSfgdV5aW U[W feaXeU	" ž & , !, 5

EF5 :dSV[S` UM#"" ! l\_ ž 5W\*FV\_ bVđSfgdV5` ,5l 3? /#ž

## Application Conditions

A bVđSf[ Y FV_ bVđSfgdW	ž&" , 5 p t) " , 5
? S] [ _ g_ EkefW_ Ha fSYW	#"" !#"" H65 / 75fi
? S] [ _ g_ EVđVđ 8geWDSf[ Y	% 3


## Engineering Drawings

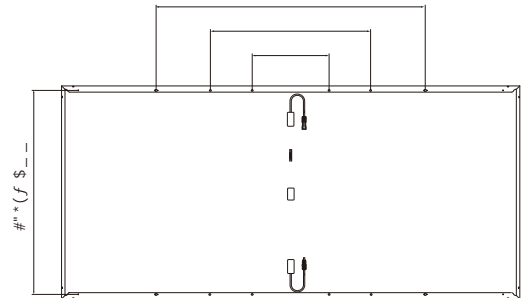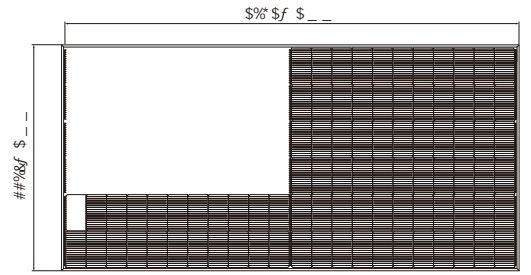

f@a fW 8adebWU[ UV\_ W e[a` eS` V fa VđS` UMđS` YWđ b VđSeW  
d/Wđ fa fZVUđ d t/Mba` V[ Y VVWS[VW \_ aVg WđSi [ Y ež

## Electrical Performance

Power-Voltage Curves (66HL4M- V 615W)

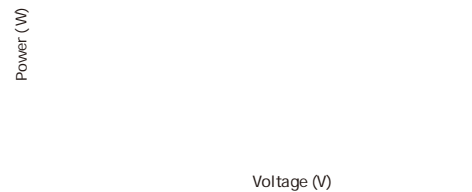

Current-Voltage Curves (66HL4M-(V) 615W)

